
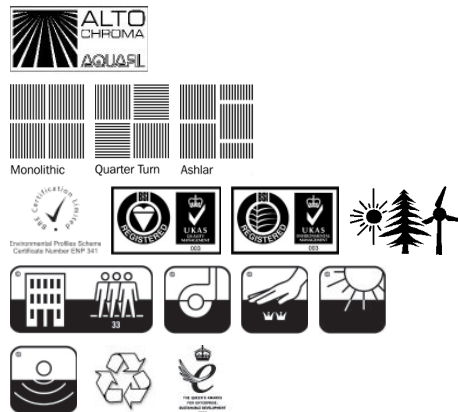


Interface FLOR | Equilibrium

SPECIFICATION

Product definition	Tufted Patterned Structured Tip Sheared Tile	Style number	3380200405
Pile Material	100% Aquafil Alto Chroma Solution Dyed Nylon	Wear Classification	EN 1307 33 Heavy Contract
Pile Yarn Weight	814 g/m ² ± 5%	Radiant panel	(EN ISO 9239/1) Euroclass Cfl S1 (EN ISO 13501) (NFP 92-506/507) (PV No. RA 01-304) M3
Total Weight	4764 g/m ² ± 5%	Hot Metal Nut	Pass, low radius of effects of ignition (BS 4790)
Pile Height	4.5 mm ± 0.3mm	Castor Chair Rating	≥ 2.4 (EN 985).
Total Thickness	8.1 mm ± 0.5mm	Dimensional Stability	< 0.2% (ISO 2551).
Gauge/Ends per 10cm	1/12 - 47.2	Vertical Electrical Resistance	5 x 10 ⁵ Ω >> 2 x 10 ¹⁰ Ω Computerguard (ISO 10965) (IBM)
Tufts per m²	167,560 ± 5%	Colour Fastness - Light	6 (ISO 105/B02)
Backing Type	Graphlex®	Tiles per Box	16 - 4 (50cm x 50cm ± 0.15%)

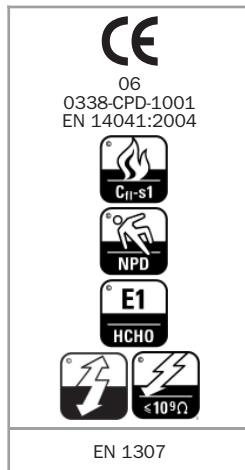

Mission Zero:
our promise to eliminate
any negative impact our company
may have on the environment
by the year 2020.

www.interfaceurope.com